

**FURUNO**

Marine Display  
***MU Series***

Model MU-152, MU-152HD, MU-192HD, MU-192, MU-270W



**MU-192HD**



**MU-152HD**

# Discover our amazing range of monitors




MU-152

1024 x 768 (XGA) 15"



**NEW** MU-152HD

1024 x 768 (XGA) 15"

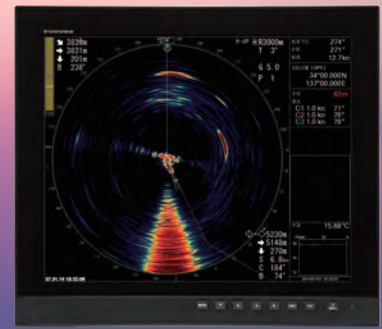

**NEW** MU-192HD

1280 x 1024 (SXGA) 19"

## Superb quality Furuno monitors for your products

- ▶ Excellent vibration and shock resistant design.
- ▶ High-brightness, high-resolution LCD for colourful video presentation even in direct sunlight.
- ▶ Various format compatible input interfaces.
- ▶ Low-profile design for a neat and beautiful console.

## A nice addition for your helm

For space-saving installation and additional security, flush mount installation is available for all the MU-Display series. The display unit can be fixed from either front or rear with the flush mount kit for MU-152/152HD/192HD/192/270W.




Easy  
installation  
with the Flush  
Mount Kit

## Waterproof and resistant

The MU-152/152HD/192HD has a waterproof display and is built to stand up to tough marine conditions when mounted at fly bridge console. The display can be rinsed with water for easy, worry-free cleaning.




ors

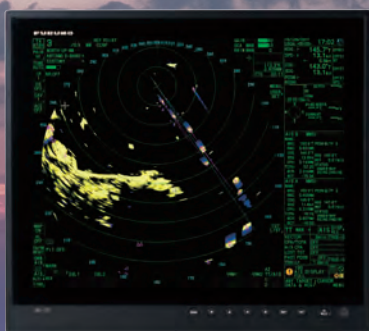

**NEW** MU-192

1280 x 1024 (SXGA) 19"

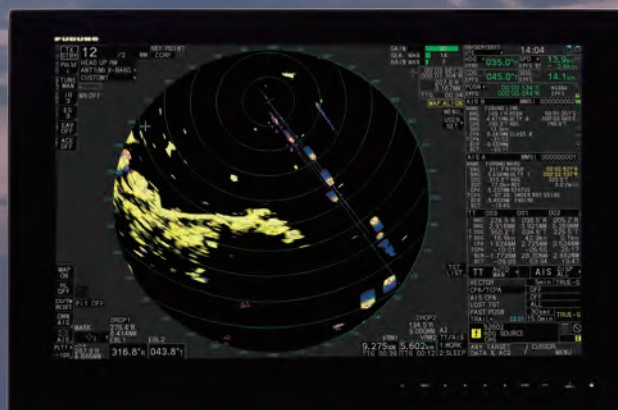

MU-270W

1920 x 1200 (WUXGA) 27"

## Compact and lightweight

The MU-Display series is slim in depth, light weight, and is so compact that it fits right into virtually any console. Its space-saving design makes optimum use of your dashboard.



Optional easy to mount and adjustable bracket

The piano black glossy screen creates a stylish high-tech look on your helm


## Specifications




	MU-152	MU-152HD	MU-192HD	MU-192	MU-270W
Screen size	15"	15"	19"	19"	27"
Resolution	1024 x 768 (XGA)	1024 x 768 (XGA)	1280 x 1024 (SXGA)	1280 x 1024 (SXGA)	1920 x 1200 (WUXGA)
Contrast	900 : 1	2500 : 1	2000 : 1	1000 : 1	1500 : 1
Viewing angle	±80°			±88°	±85°
Brightness	Max 400 cd/m <sup>2</sup>	Max 1,000 cd/m <sup>2</sup>	Max 1,000 cd/m <sup>2</sup>	Max 400 cd/m <sup>2</sup>	Max 400 cd/m <sup>2</sup>
<b>Interface</b>					
Port	Analog RGB x1, DVI-D x2 Composite x3	HDMI x1, Analog RGB x1 DVI-D x1, Composite x1	HDMI x1, Analog RGB x1 DVI-D x1, Composite x1		Analog RGB x1 DVI-D x2, Composite x1
<b>Power Supply</b>					
	12-24 VDC / 1.9 - 0.9 A	12-24 VDC / 2.5 - 1.3 A	12-24 VDC / 4.9 - 2.3 A	100-230.VAC / 0.4 - 0.3 A	100-230 VAC / 0.6 - 0.4 A
<b>Environment</b>					
Ambient temperature	-15 °C ~ + 55 °C				
Degree of protection	IP56 (Front Panel), IP22 (Rear)			IP22 (Front Panel & Rear)	
<b>Parts</b>					
Standard	1. Display Unit 2. Installation Materials, Accessories and Spare Parts				
	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at rear)	Flush Mount Kit (for fixing at front)	Flush Mount Kit (for fixing at front)
Option		1. Cable Assembly 2. Bracket Assembly (w/knobs) 3. Hood Assembly 4. Flush Mount Kit (for fixing at front)		1. Cable Assembly 2. Bracket Assembly 3. Hood Assembly 4. Dust Cover 5. Flush Mount Kit (rear)	1. Cable Assembly 2. Bracket Assembly 3. Hood Assembly 4. Dust Cover 5. Flush Mount Kit (rear)

## Drawings


**MU-152HD**  
Flush Mount  
4.5 kg 9.9 lb

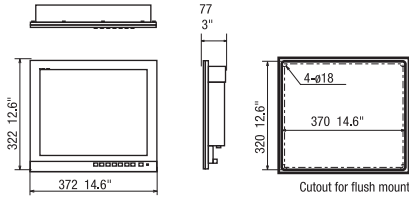


**Bracket Mount**  
6.9 kg 15.2 lb

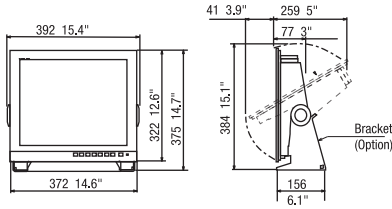


**MU-192HD**  
Flush Mount  
6.6 kg 14.5 lb

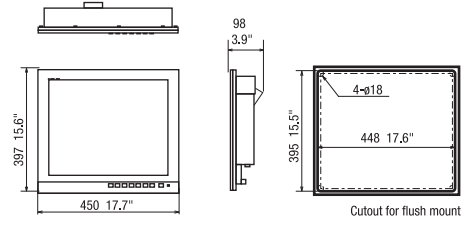


**Bracket Mount**  
9.7 kg 21.3 lb

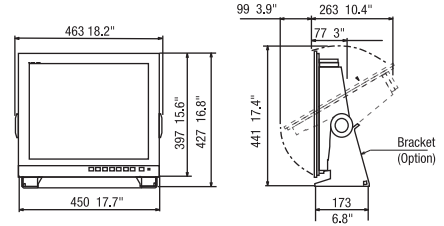


**MU-152**  
Flush Mount 4.9 kg 10.8 lb

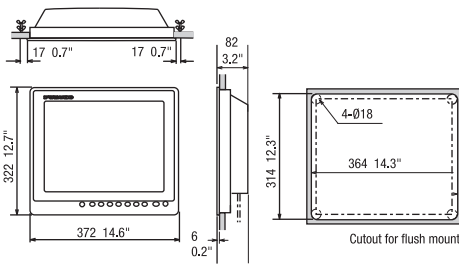


**Bracket Mount** 6.9 kg 15.2 lb

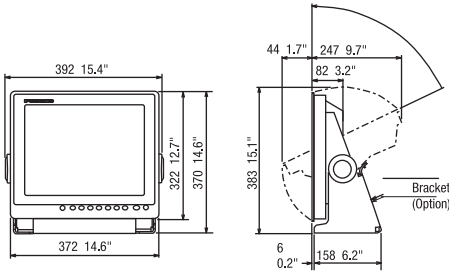


**MU-192**  
Flush Mount 8.0 kg 17.6 lb

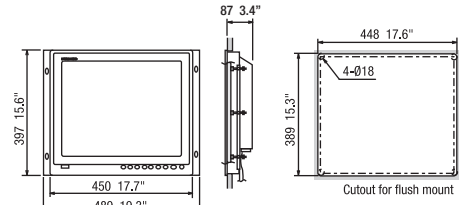


**Bracket Mount** 10.4 kg 22.9 lb

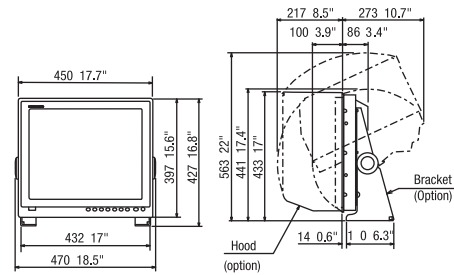

**MU-270W**  
Bracket Mount  
21 kg 46.3 lb

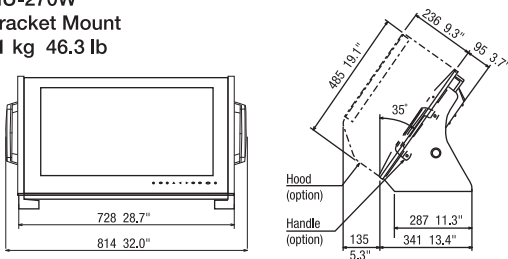

**Flush Mount**  
13 kg 28.7 lb

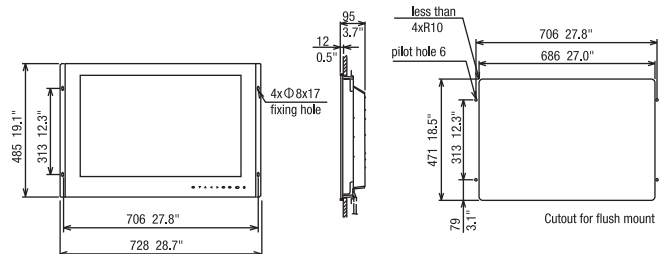

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

